


LFP 615 Battery (61kWh , 614V)

Energy & Power Optimized Battery Pack

SYSTEM FEATURES



- ✦ Safe LFP Chemistry
- ✦ Cycle Life Expectancy > 3500 Cycles
- ✦ Liquid thermal management
- ✦ Integrated BMS and CAN 2.0A Controlled
- ✦ Integrated Precharge and Isolation Measurement
- ✦ Parallel Topology for Multiple Packs in One Vehicle
- ✦ Development according to ECE R100.2, ECE R10 and UN38.3 - possible
- ✦ Development according to ISO 26262 upto ASIL C - possible

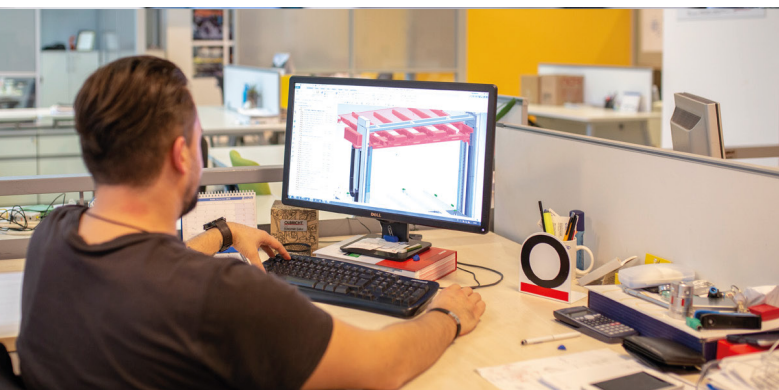

BATTERY PACK SPECIFICATIONS

ELECTRICAL DATA	VALUE	UNIT
Cell Type	LFP	
Energy (Installed / Usable)	61 / 49	kWh
Capacity	100	Ah
Nominal Voltage	614	V
Voltage - min. / max	480 - 700	V
Charge Power Cont.	61	kW
Charge Power Peak 10s	122	kW
Discharge Power Cont.	61	kW
Discharge Power Peak 10s	122	kW
Expected Cycle Life*	>3500	Cycles

MECHANICAL DATA		
Pressure drop @10l/min and 25°C	<0.5	bar
Operating Temp. during discharging	-20 ~ 55	°C
Protection classes	IP67	
Weight	564 ± 20	kg
Dimension	1665 x 700 x 340	mm

* Depends on various parameters like Power, DoD and temperature.

SYSTEM OPTION 1

Vehicle PDU

HV Distribution



SYSTEM OPTION 2

Battery System PDU

2-8 Parallel Battery Pack



DIMENSIONS

