


NMC 1050

Energy & Power Optimized Battery Pack

SYSTEM FEATURES

- ✦ Power and Energy Optimized
- ✦ Cycle Life Expectancy > 5000 Cycles
- ✦ Air Cooled Thermal Management
- ✦ Integrated BMS and CAN 2.0A Controlled
- ✦ Protection classes IP20
- ✦ Integrated Precharge and Isolation Measurement
- ✦ Parallel Topology for Multiple Packs in One Container
- ✦ Development according to ISO 26262 upto ASIL C – possible

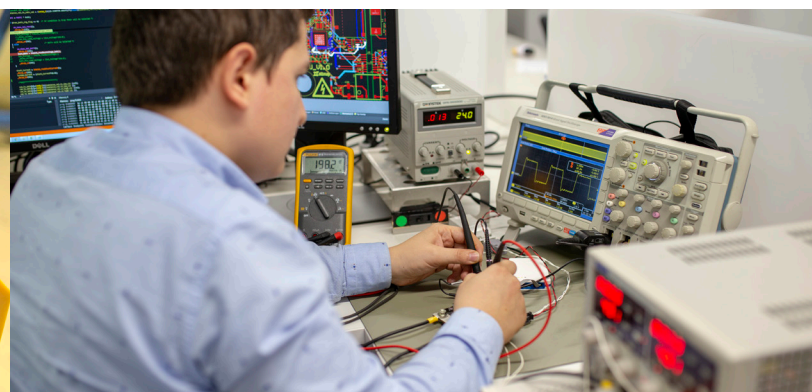


BATTERY PACK SPECIFICATIONS

ELECTRICAL DATA	VALUE	UNIT
Cell Type	NMC	
Energy (Installed / Usable)	105 / 95	kWh
Capacity	150	Ah
Nominal Voltage	701	V
Voltage - min. / max	600-810	V
Charge Power Cont.	105	kW
Charge Power Peak	250	kW
Discharge Power Cont.	105	kW
Discharge Power Peak 10s	250	kW
Cycle Life Expectancy @80%DOD	>5000	Cycles

MECHANICAL DATA		
Operating Temp. during discharging	-10 ~ 45	°C
Protection classes	IP20	
Weight	900	kg
Dimension	800 x 700 x 2120	mm

BATTERY MODULE

Single Module

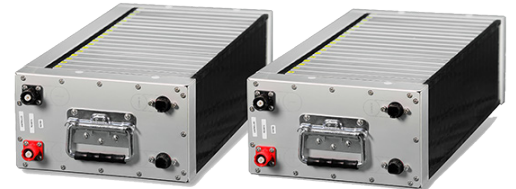

HV BUSBAR

Battery System PDU
2-8 Parallel Rack Cabinet



DIMENSIONS

